

## CARACTERÍSTICAS DO MODELO:

- **MATERIAIS:**
  - Vidros temperados de 6 mm com tratamento anti-calcário Maxiclean
  - Perfis de alumínio anodizado polido ou lacado a preto-mate
  - Acessórios/ferragens em alumínio anodizado polido/lacado a preto-mate e em Zamak
- **ESPECIFICAÇÕES:**
  - Altura de 2000 mm
  - Perfil superior telescópico, que permite afinações até 50 mm\* ou 100 mm
  - Rolamentos ocultos
  - Sistema de liberação de portas, para uma fácil limpeza
  - Puxador metálico minimalista
  - Vedantes translúcidos
  - Portas com fechos magnéticos
  - Reversível
- **PESOS:**
  - ±10% Consultar tabela

### PEÇA:

**DESCRIÇÃO:** DIVISÓRIA DE DUCHE COM PORTAS DE CORRER

**SERIE:** NEW EVOLVE

**VERSÃO:** L2E + LF 800 (1 vidro fixo + 1 porta de correr + 1 lateral de 800 mm)

**REF.:** S6024..000###00 (Consultar em baixo)





### - 12M  
Cromado




### - 16M  
Preto-mate

## CROQUIS COM DIMENSÕES GERAIS E DE LIGAÇÃO:


(mm)

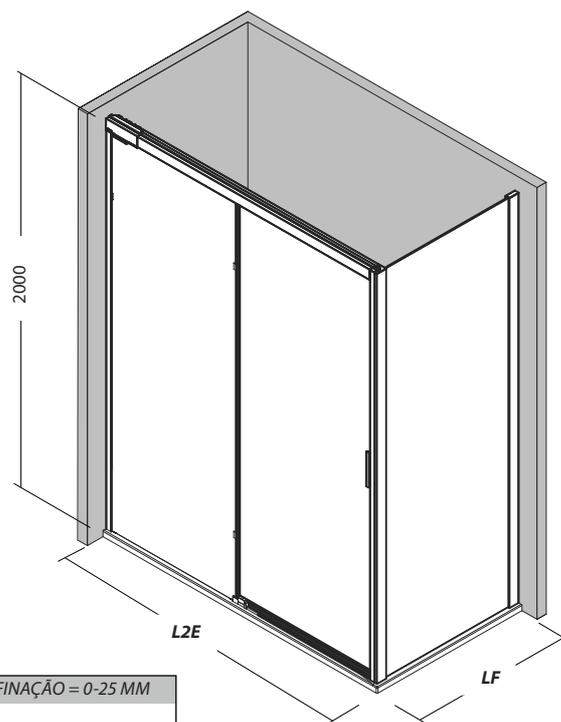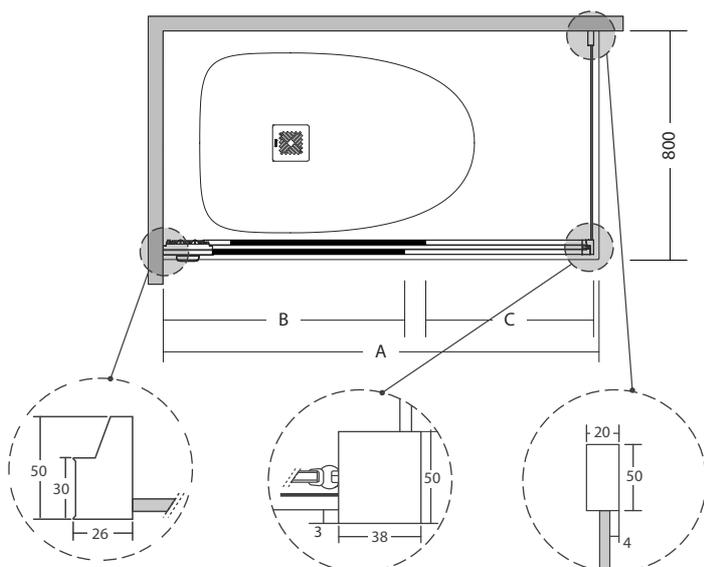

L2E - MARGEM DE AFINAÇÃO 1000 = 0-50 MM / 1100-1800 = 0-100 MM

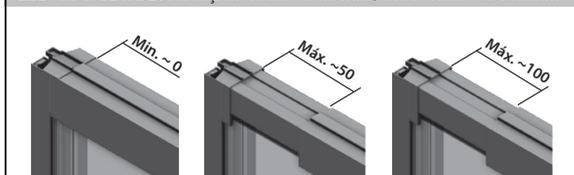

LF - MARGEM DE AFINAÇÃO = 0-25 MM



Código	Acabamento	Medida frontal (mm)	A (mm)		C (mm)	B (mm)	Medida lateral (mm)		Peso (Kg)
			Min.	Max.			Min.	Max.	
S60243600012M00	Cromado	1000	Min.	970	395	480	Min.	770	66,0
S60243600016M00	Preto-mate		Max.	1020			Max.	805	
S60243900012M00	Cromado	1100	Min.	1021	395	530	Min.	770	69,5
S60243900016M00	Preto-mate		Max.	1120			Max.	805	
S60244200012M00	Cromado	1200	Min.	1121	445	580	Min.	770	73,0
S60244200016M00	Preto-mate		Max.	1220			Max.	805	
S60244500012M00	Cromado	1300	Min.	1221	495	630	Min.	770	76,5
S60244500016M00	Preto-mate		Max.	1320			Max.	805	
S60244800012M00	Cromado	1400	Min.	1321	545	680	Min.	770	80,0
S60244800016M00	Preto-mate		Max.	1420			Max.	805	
S60245100012M00	Cromado	1500	Min.	1421	595	730	Min.	770	83,5
S60245100016M00	Preto-mate		Max.	1520			Max.	805	
S60245400012M00	Cromado	1600	Min.	1521	645	780	Min.	770	87,0
S60245400016M00	Preto-mate		Max.	1620			Max.	805	
S60245700012M00	Cromado	1700	Min.	1621	695	830	Min.	770	98,0
S60245700016M00	Preto-mate		Max.	1720			Max.	805	
S60246000012M00	Cromado	1800	Min.	1721	745	880	Min.	770	101,5
S60246000016M00	Preto-mate		Max.	1820			Max.	805	

## MODEL FEATURES:

- **MATERIALS:**
  - 6 mm tempered glasses with Maxiclean anti-cal treatment
  - Aluminium profiles with polished or black matt finishing
  - Accessories in polished/black matt aluminium and Zamak
- **SPECIFICATIONS:**
  - 2000 mm height
  - Telescopic upper profile that allows compensation till 50 mm\* or 100 mm
  - Hidden bearings
  - Door release system, to provide easy cleaning
  - Minimalist mettalic handle
  - Transparent gaskets
  - Magnetic locks on doors
  - Reversible
- **WEIGHT:**
  - ±10% Check table

## PIECE

**DESCRIPTION:** SHOWER ENCLOSURE WITH SLIDING DOORS

**SERIES:** NEW EVOLVE

**VERSION:** L2E + LF 800 (1 fixed glass + 1 sliding door + 800 mm lateral glass)

**REF.:** S6024..000###00 (Please check below)




### - 12M  
Polish silver




### - 16M  
Matt black

## SKETCH WITH GENERAL AND CONNECTION DIMENSIONS:


(mm)

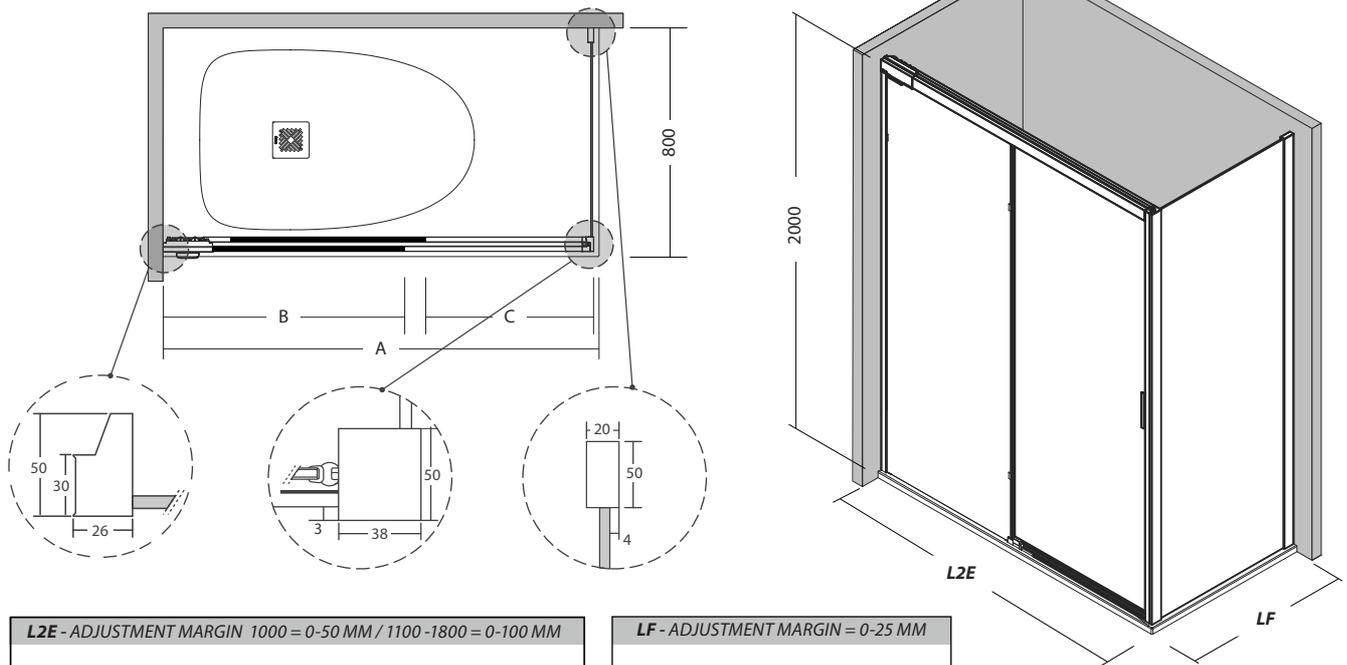

L2E - ADJUSTMENT MARGIN 1000 = 0-50 MM / 1100 -1800 = 0-100 MM

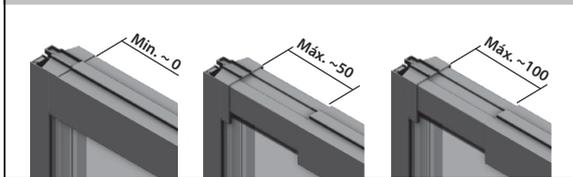

LF - ADJUSTMENT MARGIN = 0-25 MM



Reference	Finishing	Frontal measure (mm)	A (mm)		C (mm)	B (mm)	Lateral measure (mm)		Weight (Kg)
			Min.	Max.			Min.	Max.	
S60243600012M00	Polished silver	1000*	Min.	970	395	480	Min.	770	66,0
S60243600016M00	Matt black		Max.	1020			Max.	805	
S60243900012M00	Polished silver	1100	Min.	1021	395	530	Min.	770	69,5
S60243900016M00	Matt black		Max.	1120			Max.	805	
S60244200012M00	Polished silver	1200	Min.	1121	445	580	Min.	770	73,0
S60244200016M00	Matt black		Max.	1220			Max.	805	
S60244500012M00	Polished silver	1300	Min.	1221	495	630	Min.	770	76,5
S60244500016M00	Matt black		Max.	1320			Max.	805	
S60244800012M00	Polished silver	1400	Min.	1321	545	680	Min.	770	80,0
S60244800016M00	Matt black		Max.	1420			Max.	805	
S60245100012M00	Polished silver	1500	Min.	1421	595	730	Min.	770	83,5
S60245100016M00	Matt black		Max.	1520			Max.	805	
S60245400012M00	Polished silver	1600	Min.	1521	645	780	Min.	770	87,0
S60245400016M00	Matt black		Max.	1620			Max.	805	
S60245700012M00	Polished silver	1700	Min.	1621	695	830	Min.	770	98,0
S60245700016M00	Matt black		Max.	1720			Max.	805	
S60246000012M00	Polished silver	1800	Min.	1721	745	880	Min.	770	101,5
S60246000016M00	Matt black		Max.	1820			Max.	805	